



DC265 Visual Presenter

Quick Start Guide

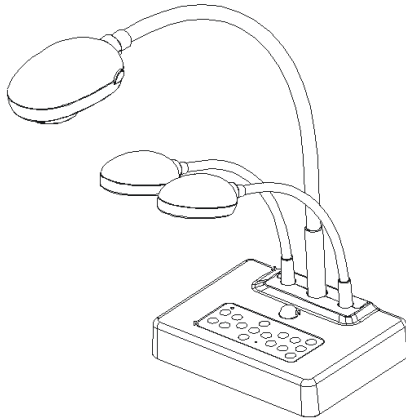


1. Package Content

DC265




Quick Start Guide



User Manual

(For download of other language versions, please visit Lumens website)




Base Installation Guide & Download Card



Remote control



Remote Control Holder



Extender Adapter



VGA Cable




USB Cable



C-Video Cable



Power Cord



Appearance may vary with country/region.


Microscope Adapter



Accessory Pouch





Backlight (Optional)



Padded Carry Bag (Optional)



2. System Diagram

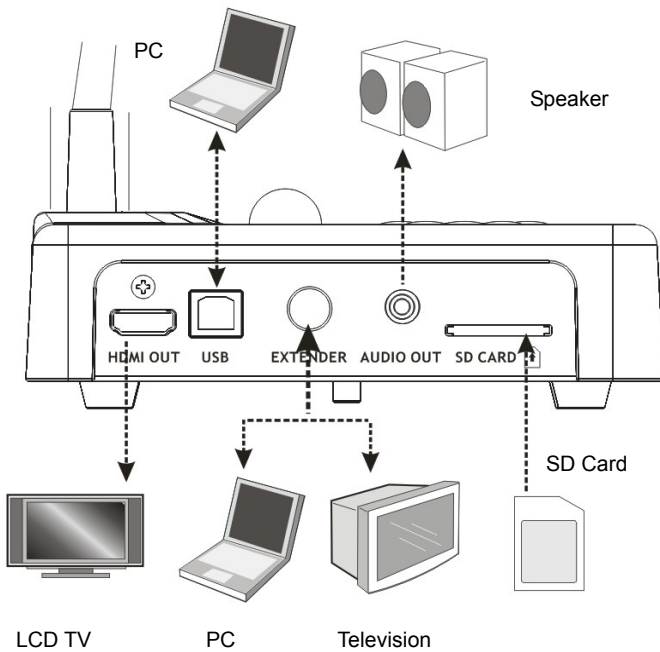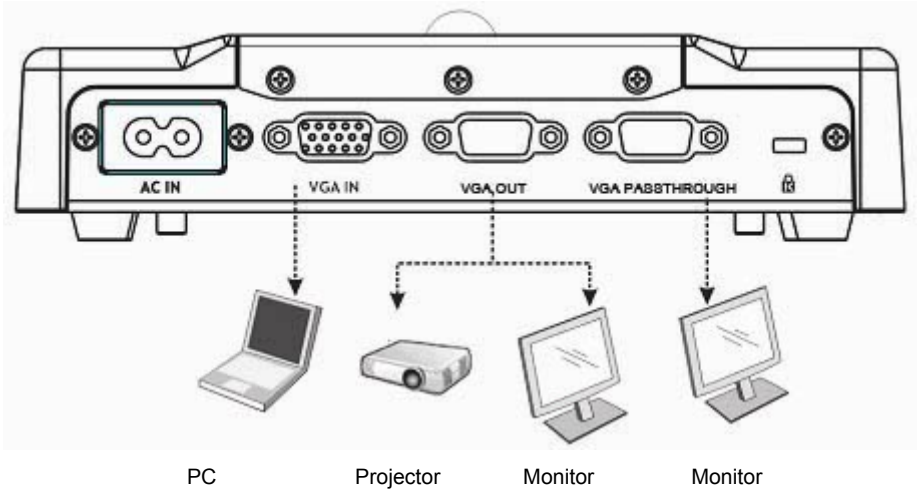


3. Mounting the DC265 at Desktop

1. Please set up the DIP Switch settings first. Refer to [chapter 5 “DIPSwitch Settings” in the DC265 user manual](#).
2. Please refer to the [Base Installation Guide](#) for installation instructions for all parts.

4. Connecting Devices

4.1 Step 1: Plugging in the Power Outlet

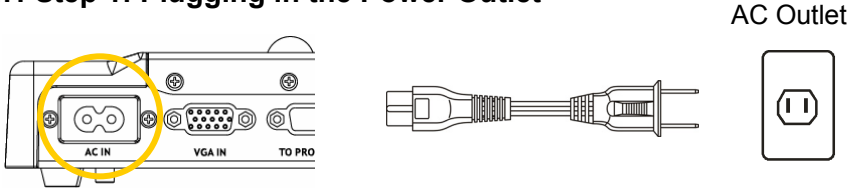


<Note> Appearance of power cord may vary with countries/regions.

4.2 Step 2: Connecting with components

4.2.1 Connecting to a Projector


- Connect the VGA OUT on the DC265 to the VGA IN on the projector using the VGA cable.

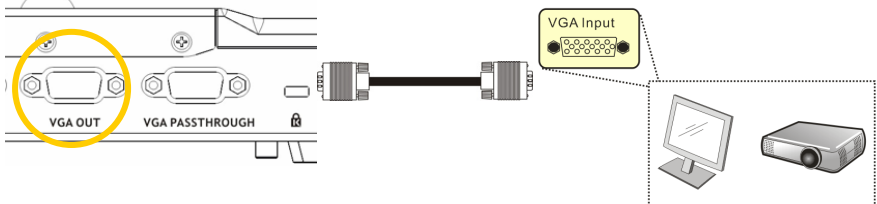

4.2.2 Connecting to a Monitor


- Connect the VGA PASSTHROUGH on the DC265 to the VGA IN on the monitor using the VGA cable.

<Note> The VGA PASSTHROUGH connector only outputs VGA IN signals.

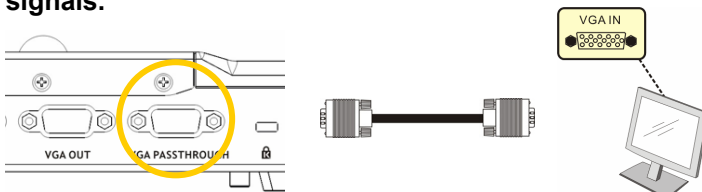


4.2.3 Connecting to a TV

1. Using EXTENDER and C-Video cable to connect EXTENDER of DC265 to a C-Video of TV.

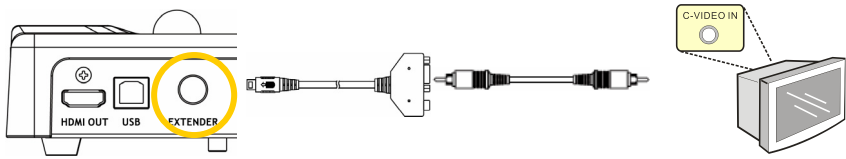


2. Adjust DIP Switch Setting

■ NTSC : America, Taiwan, Panama, Philippine, Canada, Chile, Japan, and Mexico.



■ PAL : Country/region not listed above:




<Note> OSD is not available in C-Video. Functions such as [Menu] / [Rotate] / [PAN] / [Source] / [Record] / [Capture] / [Delete] / [PBP] / [Slide Show] are not available on control panel and the remote control.

<Note> VGA output is not supported once C-Video output is enabled.

3. DIP Switch setting will not be available until restarting the DC265.


4.2.4 Connecting to a LCD TV/ PDP

● Using the HDMI cable to connect a LCD TV/ PDP

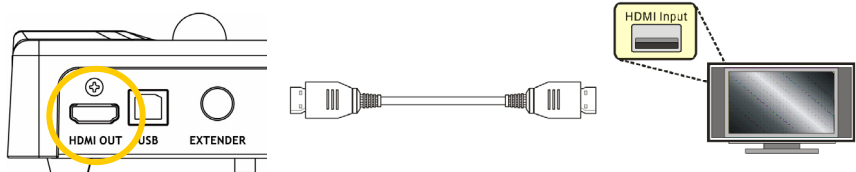


4.2.5 Connecting to a Computer

- Connecting to a computer through VGA IN

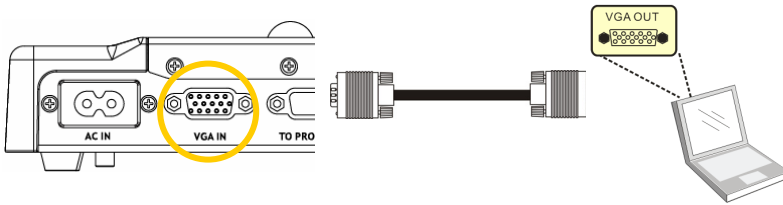


- Connecting to a computer through USB


Connect to USB port then install the supplied queue™ program. Please refer to the [DC265 user manual](#)

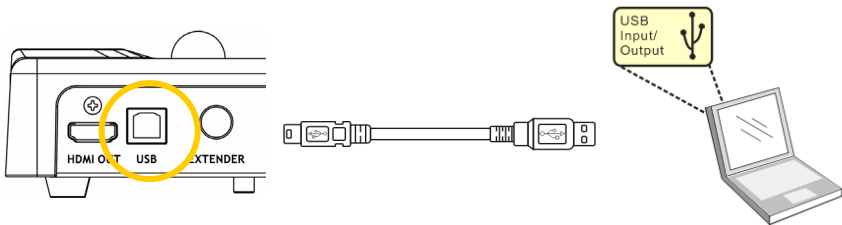

- Using the EXTENDER and RS-232 cable to connect EXTENDER of DC265 to a RS-232 of computer.

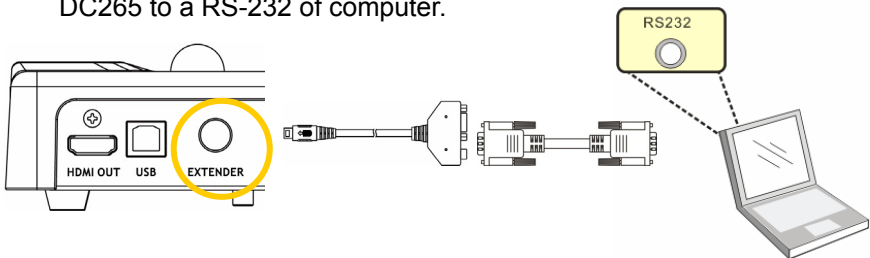


4.2.6 Connecting to Speaker

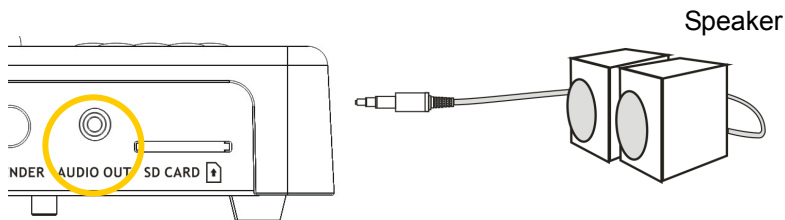

5. Start Using the DC265

5.1 Turn on the DC265

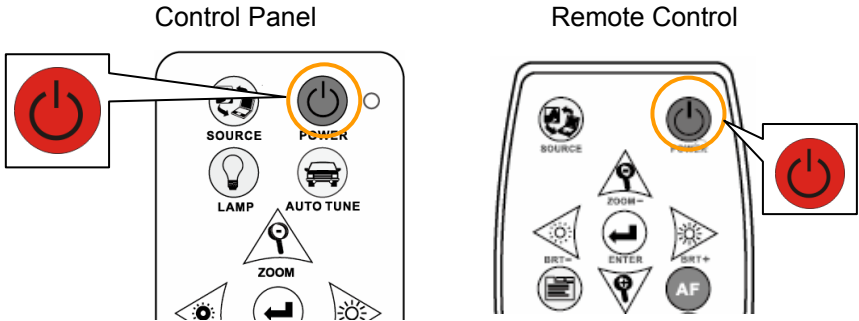

- When using the **remote control**, aim at the receptor on the DC265, and press the power button.
- Once DC265 is turned on, the LED on the **control panel** will flash a few times and stay lit. Please contact your distributor if the LED is not on.

<Note> Once the password page is shown, please key in the password. If you forget it, please contact your distributor or the service center.

*For detailed menu function introduction and operation instructions, please refer to the [user manual](#).